

Compatible with:




Warnings:

Carefully read all instructions and review the images before attaching.

Do not attach anything to the mount until after attaching the mount to the dashboard. Doing so makes it more difficult to attach the mount to the dash. **Please note:** If you screw into the mount it will be considered used and therefore non-refundable.

The ProClip mount and/or holder in the installation pictures may look slightly different from the one you have received. However, the same instructions apply. If you have questions call our customer service at **1-800-296-3212** or **+1-847-388-7171**.


ProClip USA, Inc. may not be held liable for any personal injury or damage to a vehicle or device, resulting from accident or improper use or installation, before, during or after the installation or removal of this mount and/or holder.

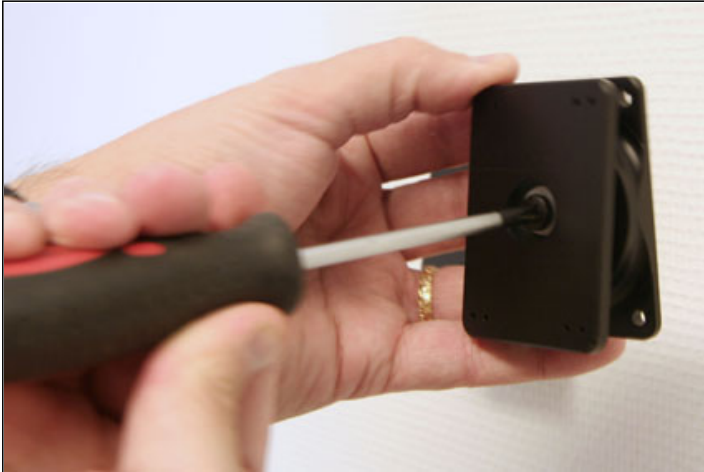

1. Place the Tilt Swivel base plate onto your mounting bracket. Due to the size of the base plate there are no matching hole patterns so you have to pre-drill the holes into the mount. Attach the base plate by using the applicable screws enclosed - self-tapping screws if the mount has small holes or machine screws with nuts if the mount has large holes.



2. Place the Tilt Swivel base plate onto your mounting bracket. Due to the size of the base plate there are no matching hole patterns so you have to pre-drill the holes into the mount. Attach the base plate by using the applicable screws enclosed - self-tapping screws if the mount has small holes or machine screws with nuts if the mount has large holes.

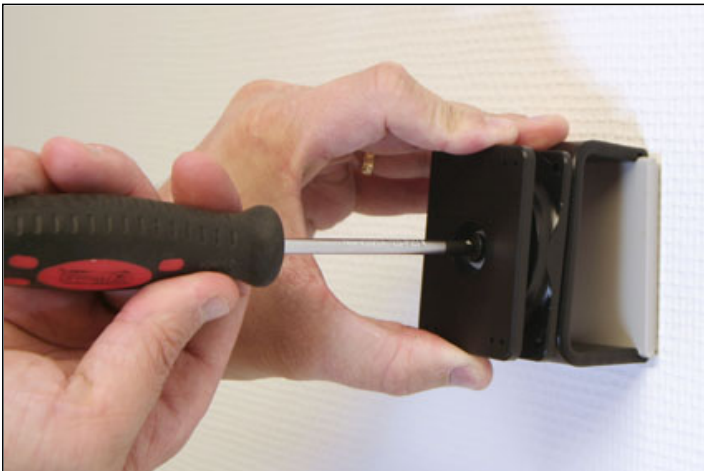

3. Place the Face Plate onto the Tilt Swivel base plate and attach it with the center screw. This screw also controls the pivot, tighter for a firm hold and loose for more (easier) movement/angling of the holder.



4. The Tilt Swivel Mount in place. You can attach any holder or car kit to the Tilt Swivel Mount.